



# REFUSE ENCLOSURE STANDARDS


**FRONT LOAD (DOUBLE)**

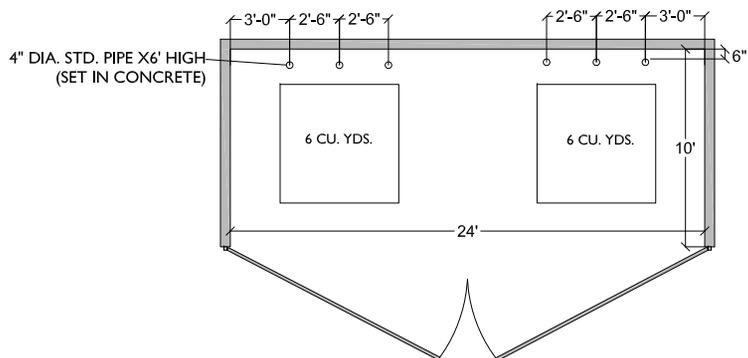


**FRONT LOAD (DOUBLE) WITH SIDE WASTE OIL CONTAINER**

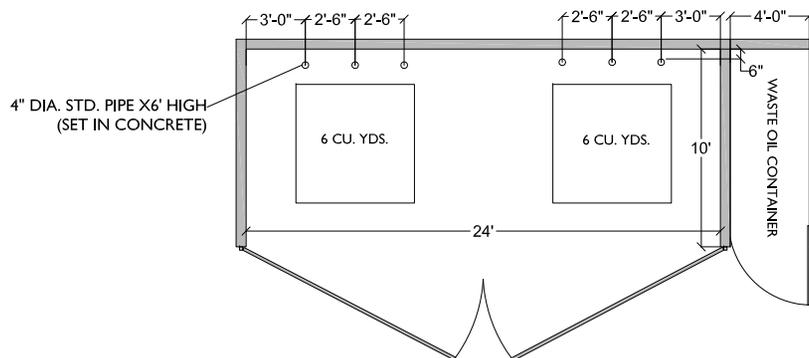


**FRONT LOAD (SINGLE)**

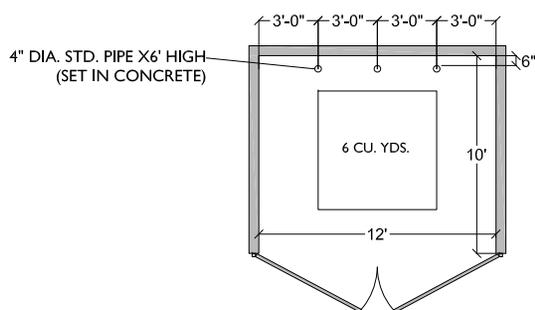


**FRONT LOAD (DOUBLE) TYPICAL ELEVATION WITH GATES**

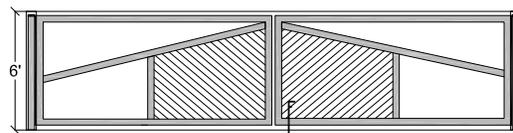


**SIDE PROFILE WITH REAR WASTE OIL CONTAINER**

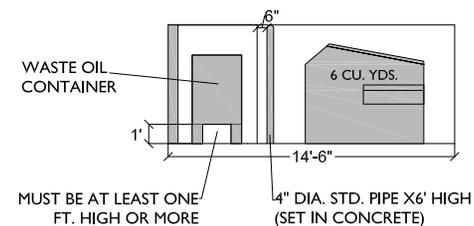

**FRONT LOAD WITH REAR WASTE OIL CONTAINER**

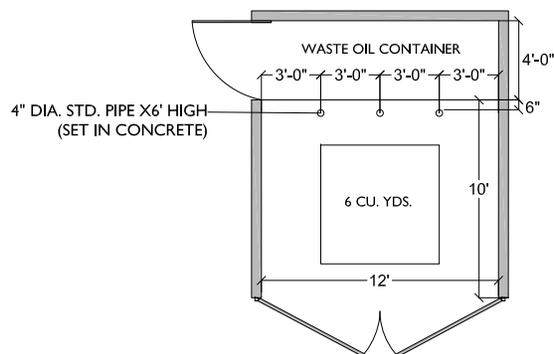

**FRONT LOAD WITH SIDE WASTE OIL CONTAINER**

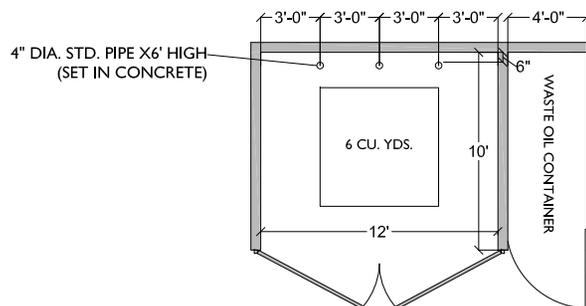

NOTE: Gates must be mounted on the outside of the enclosure.

NOTE: All gates will be required to have gate pins and holes drilled in the ground to secure them in the open and closed position.

\* AFTER APPROVAL AND PRIOR TO CONSTRUCTION: Mark footing/wall locations on the ground and call Solid Waste at 520-421-8625 for pre-pour inspections.

Contact Solid Waste Division @ 520-421-2625  
Ext 4700 for orientation of enclosure.